


D-12 and D-12-S Rod Clamps


Dayton/Richmond D-12 Rod Clamps are cast malleable iron clamps used with smooth or deformed 1/4", 3/8" and 1/2" rod to tie forms. The rod is clamped securely by a bolt or nut/bolt combination. Nail holes are provided to affix the clamp to the wales. For an additional safety measure, Dayton/Richmond recommends bending the rod approximately 90 degrees behind the clamp (See application sketch).

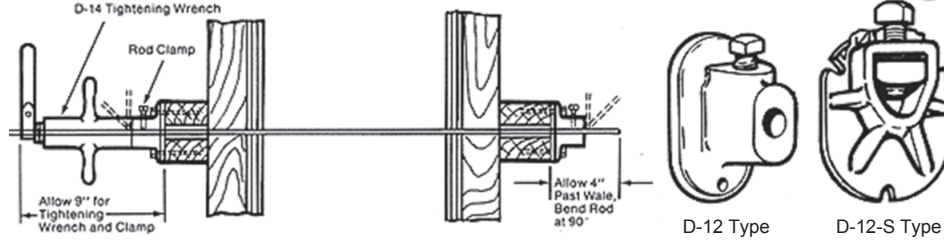

Type	Size	Rod Diameter	Safe Working Load Tension (lbs.)
D-12	No. 1	1/4"	1,125
D-12-S	No. 1	1/4"	1,125
D-12	No. 2	3/8"	2,250
D-12-S	No. 2	3/8"	2,250
D-12	No. 3	1/2"	3,750

D-14 Tightening Wrench

Dayton/Richmond D-14 Tightening Wrench is placed over a smooth or deformed rod behind a rod clamp and is used to draw the assembly tight allowing the clamp to be properly tightened. The D-14 wrench is available in 1/4", 3/8" and 1/2" sizes.

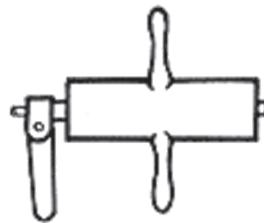

PACKAGING
D-12 Rod Clamps: 50 per carton
D-14 Tightening Wrench: 1/4" in stock