



SHEET METAL FLASHINGS

Heckmann custom fabricates flashings from Stainless Steel and Mill Galvanized in 11 gage to 26 gage, 16 oz. Copper, and .032" Aluminum. Flashing rolls, which can be cut at the jobsite, are available in .010 and .015 Stainless Steel.


of material and length. Special shapes are available. Shapes can be made with 1/2" hems, turned inside or outside, on long angles.

Lengths: Flashings are usually furnished in 10 ft. lengths.

SHAPES: Shapes are made to customer's specifications as to dimensions, degree of angle at bends, gages, type

(NOTE: Aluminum should not be used as a flashing material in brick masonry construction.)

MASONRY

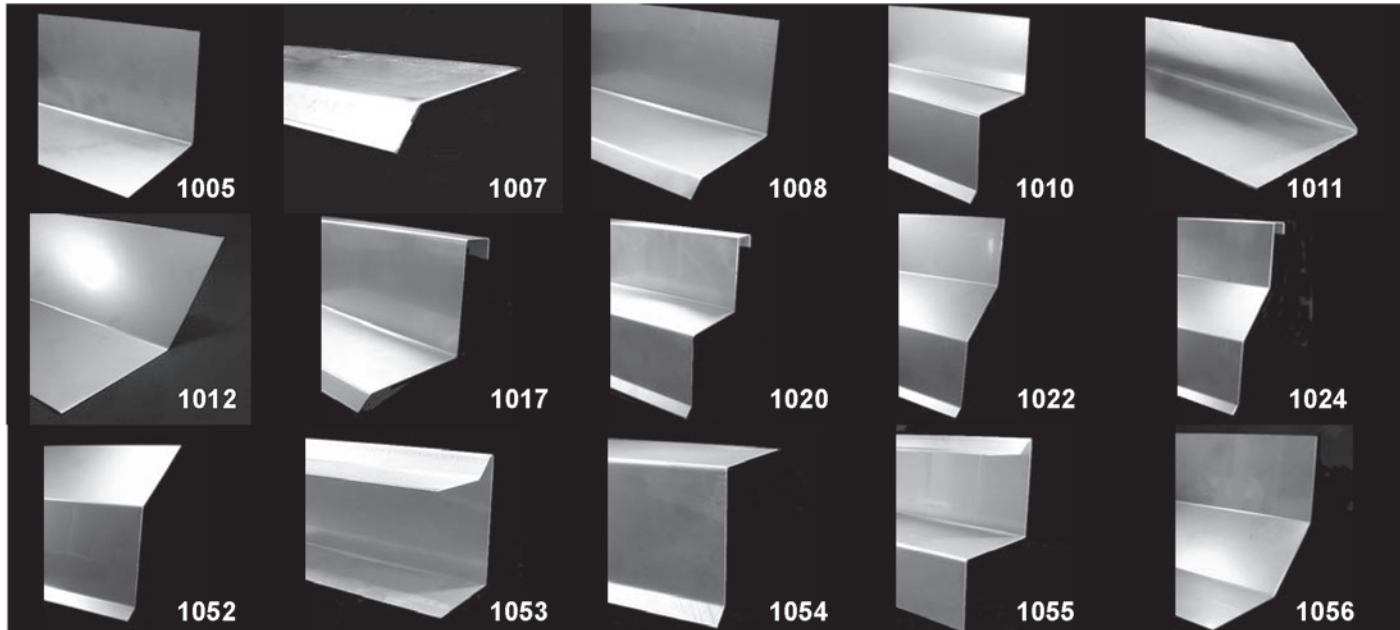

No. 80 Fiberweb® Thru-Wall Flashing FIBERWEB® 200

- Manufactured from black laminate of polyester film, 20 x 10 fiberglass scrim and a layer of vinyl film.
- Approved by Army Corps of Engineers Guide Specification CEGS-07600
- Average 8 mils thick

FIBERWEB® 300

- 1/3 mil metal foil laminated between layers of polyester film bonded to a 20 x 10 fiberglass scrim reinforcement.
- Fiberweb 300 has a total average mil thickness of 7 mils.

Termination Bar: For securing flashing to wall. 1/8" thick stainless steel x 1 1/4" wide x 8 ft. long with holes 12" or 16" o.c. 8" o.c. in stock.

