



4225 W. Ogden Ave. • Chicago, IL 60623 • Phone: (773) 522-1900

FLASHING

COPPER AQUA-FLASH®


A composite flexible flashing composed of a layer of polyester film bonded to a solid sheet of soft tempered copper bonded to 32 mils of a highly adhesive SBS modified bitumen (rubberized asphalt) with a removable silicone coated liner. By encapsulating the copper in the film and the rubberized asphalt, the copper is completely protected from any alkalis or acids found in concrete or mortar. Copper Aqua-Flash membrane can be applied as part of a system which uses both Aqua-Flash primer and mastic. It may be applied to masonry, concrete, steel, wood and gypsum.

Features and Benefits

Copper Aqua-Flash is self-adhering and self-sealing and offers excellent puncture and abrasion resistance. It is designed to “self-heal” if damaged slightly during installation, since the adhesive system will elongate and recover. It offers high temperature stability.

Materials

Flashings shall be Copper Aqua Flash consisting of 2 or 3 oz. copper sheet laminated with film on one side and bonded to 32 mils of rubberized asphalt for a total mil thickness respectively of 60 mils and 70 mils.

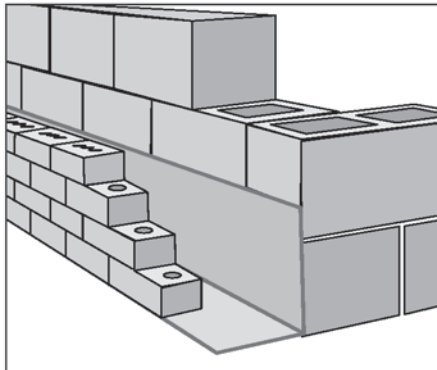

Copper Aqua-Flash

AQUAFLASH 500®

Materials

A composite sheet type waterproofing membrane consisting of 8 mils of high density cross laminated polyethylene bonded to 32 mils of rubberized asphalt for a total thickness of 40 mils. Available in 12”, 16”, 18”, 24”, and 36” widths. Standard length is 50 linear feet.

Applications

- Thru-wall flashing
- Concealed flashing
- Foundation sill flashing
- Base Flashing
- Spandrel flashing
- Head and sill flashing
- Parapet flashing

Features

A composite flashing which:


- Is self-healing
- Needs no reglet when adhering membrane to vertical substrate
- Has excellent puncture resistance
- Is self-healing since the adhesive system will elongate and recover if somewhat damaged.

AQUA-MASTIC® AND AQUA-PRIMER®

AQUA-MASTIC and AQUA-PRIMER are available in 5 gallon pails. AQUA-MASTIC is also available in 32 oz. tubes.

Special Requirements

All materials specified shall be delivered to the jobsite in approved manufacturer’s sealed containers bearing manufacturer’s name and material identification.

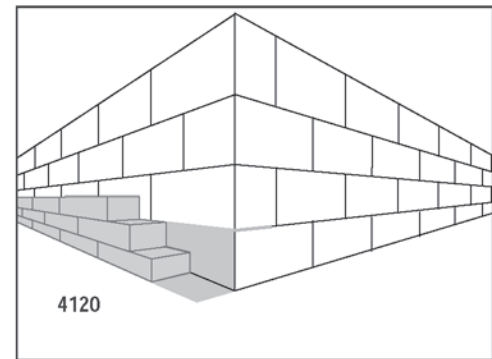

Aqua-Flash 500



MASONRY