



4225 W. Ogden Ave. • Chicago, IL 60623 • Phone: (773) 522-1900

DIMEX CONTROL JOINT

PVC

Available in 48" lengths, black in color


Manufactured from a PVC compound grade conforming to ASTM D-2287-654 with a durometer hardness of 85 ± 5 shore A when tested in conformance with ASTM D-2240.

Rubber


Available in 48" lengths

Manufactured from high-grade synthetic rubber compound conforming to ASTM D-2000 2AA-805 with a durometer hardness of 80 ± 5 shore A when tested in conformance with ASTM D-2240.


#2011 - 2 5/8" PVC, Black, 48" long
#2010 - 2 5/8" Rubber, 48" long




#2012 - 6 7/8" PVC, Black, 48" long

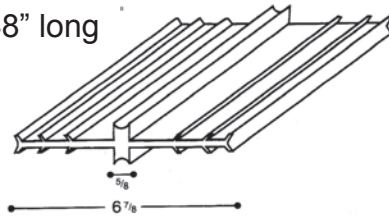

#2013 - 11 1/8" PVC, Black, 48" long

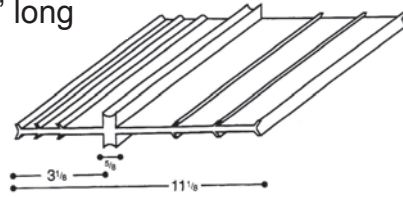

#2014 - 2 5/8" PVC, Tee, Black, 48" long



MASONRY