


COPPER FABRIC FLASHING

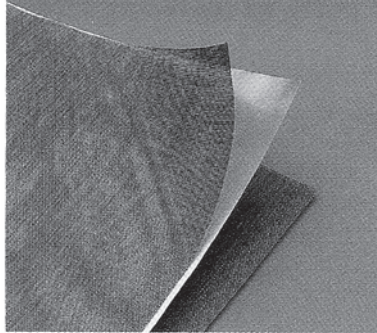

The highest quality laminated copper flashing on the market today. This unique, time-proven flashing is available in 2, 3, 5, or 7 oz. per square foot to meet all your specification needs. Two layers of dense glass fabric and a special blended asphalt are laminated to the copper core

to produce greater tensile strength and improved puncture resistance. This composition of copper, glass fabric, and asphalt will ensure a permanent bond in the mortar joint and protection from moisture.

Size: Rolls 36" wide x 25' long
Will slit to multiple widths

STOCK SIZES

18" x 25'
24" x 25'
36" x 25'

COP-R-COTE

A quality masonry flashing incorporating a full sheet of copper weighing 2, 3, 5, or 7 oz. per square foot coated with a special plasticized asphalt. The total weight of the asphalt coating will weigh not less than 6 ounces per square foot. Complete resistance to acid and alkali will ensure permanent moisture protection.

Size: Rolls 36" x 25' long.
Will slit to multiple widths

COPPER SEALTITE 2000 Patent Pending

The newest lightweight copper thru-wall flashing on the market is Copper Sealtite 2000. This non-asphaltic copper flashing consists of a 3 oz. or 5 oz. copper sheet laminated between two layers of dense fiberglass fabric. The non-asphaltic adhesive makes Copper Sealtite 2000 compatible with all types of sealants. If your installation requires sealants at flashing locations, Copper Sealtite 2000 is the long awaited answer.

Size: Rolls 36" x 60' long.
Will slit to multiple widths

COP-R-KRAFT DUPLEX + LEAD

A bimetallic masonry flashing consisting of a copper and lead core of 2, 3, 5, or 7 oz. per square foot (total weight of combined metal). Two layers of creped kraft paper reinforced with fiberglass are laminated to both sides of the bimetallic core. An economical masonry flashing, Cop-R-Kraft Duplex + Lead will provide a positive bond in all mortar joints and permanent moisture protection.


Size: Rolls 36" wide x 60' long (2 oz. and 3 oz.)
Rolls 36" wide x 40' long (5 oz. and 7 oz.)
Will slit to multiple widths.

STOCK SIZES


18" x 60'
36" x 60'

COP-R-KRAFT DUPLEX

A full copper sheet weighing 1, 2, 3, or 5 oz. per square foot bonded between two layers of waterproofed, creped kraft paper with a plasticized asphalt compound. The 3 and 5 oz. weights are reinforced with glass fibers to meet GSA, FHA and Corps of Engineers specifications. This strong but flexible masonry flashing will give you economical and permanent moisture protection.

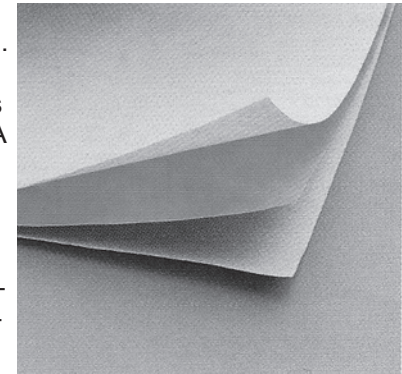

Size: Rolls 36" wide x 60' long
Will slit to multiple widths

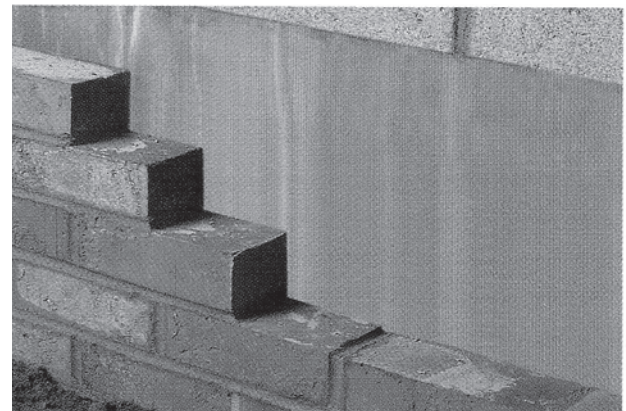

MASONRY