

SEALTIGHT AIR-SHIELD (cont'd)

Features & Benefits

- Rugged membrane can actually fold-to-shape during application as a thru-wall flashing
- Controlled thickness membrane is ideal for either air barrier or flashing membrane applications.
- Cross laminated polyethylene film has excellent tensile strength, elongation, and tear resistance.

PHYSICAL PROPERTIES


Color:	White
Thickness:	40 mils (1 mm)
Water Vapor Transmission (grains / sq. ft. / hr.):	0.05 Max.
ASTM E-96	
Water Absorption (% by weight):	0.25 Max.
ASTM D-570	
Application Temperature:	25°F Min.

MASONRY

PACKAGING

4" x 75'	16" x 75'
6" x 75'	18" x 75'
9" x 75'	24" x 75'
12" x 75'	36" x 75'

* Special sizes available on request

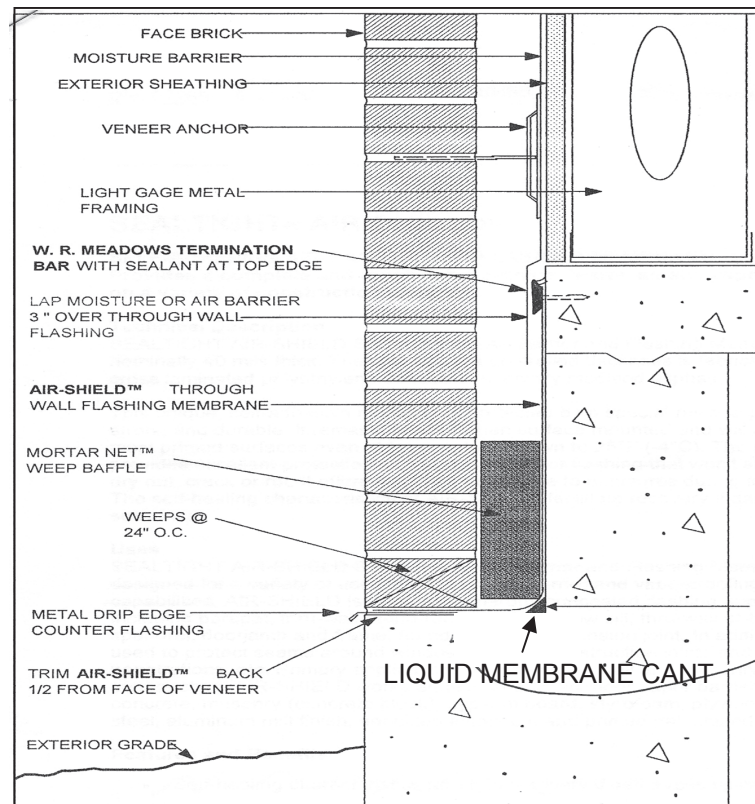

BASE FLASHING DETAIL AT ABOVE GRADE BRICK SHELF