



LITHOCHROME COLOR HARDENER

A ready-to-use, dry-shake, colored or uncolored hardener for freshly placed concrete hardscapes or floors. Available in 16 standard and 8 designer colors. Custom colors are available upon request.

DESCRIPTION AND USE

LITHOCHROME Hardener is formulated to be easily incorporated into the surface of freshly placed concrete, LITHOCHROME Color Hardener produces hard, durable, abrasion-resistant hardscapes on interior floors. LITHOCHROME color-hardened concrete is longer wearing, easier to maintain, and more resistant to the effects of freeze-thaw cycles and deicing salts.

LITHOCHROME Color Hardener may be sealed and maintained with LITHOCHROME COLORWAX for exterior flat-work or COLORCURE Concrete Sealer for interior and exterior applications. Both sealers are durable, semi-opaque, color matched sealers that protect and improve appearance.

APPLICATION

LITHOCHROME Color Hardener should be applied after the bleedwater has disappeared and floating will not disrupt the surface. It is broadcasted in 2-3 separate operations (depending on the type of surface), worked into the surface with a float (after each operation), and troweled after the final application. For curing and sealing one coat of LITHOCHROME Colorwax, COLORCURE Concrete Sealer or SCOFIELD Cureseal should be applied by airless sprayer when concrete is hard enough to be walked on and surface moisture has evaporated.

PACKAGING AND COVERAGE


| | | | |
|---------------------------------|------------------------------|-------------------------|----------------------------|
| LITHOCHROME: | 60 lb. bags | Standard Application: | 60 lbs. per cubic sq. ft. |
| | | Commercial Application: | 90 lbs. per cubic sq. ft. |
| | | Heavy Duty Application: | 120 lbs. per cubic sq. ft. |
| COLORWAX (2 Component): | 1 and 5 gal. units | | 300-400 sq. ft. per gallon |
| COLORCURE (2 Component): | 1 and 5 gal. units | | 300-400 sq. ft. per gallon |
| SCOFIELD CURESEAL: | 1, 5, and 55 gal. containers | | 300-500 sq. ft per gallon |



Bitterroot Wood Products, Inc.

B.C. MANUFACTURING

BWP manufactures 1/2", 3/4", 1", and 1 1/2" chamfer strips in 12' lengths. Reveal strips can be produced in the same lengths but since there are many different dimensions, you must provide detailed drawings with dimensions. 1/2" and 3/4" chamfer is produced from a D&Btr (clear) grade lumber in lodgepole pine, engleman spruce, ponderosa pine, and hem-fir species (western whitewoods species). The 1", 1 1/2" and reveal is manufactured from select structure grade in the same species.

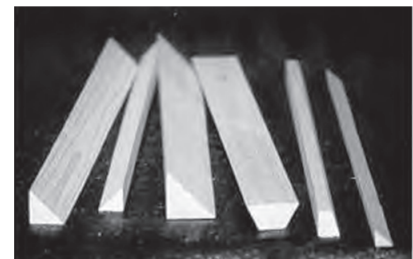

PACKAGING

1/2", 3/4", and 1" x 12' - 600' per bundle