




**Heckmann**  
Building Products Inc.



4225 W. Ogden Ave. • Chicago, IL 60623 • Phone: (773) 522-1900

## ANCHORS FOR MASONRY TO CONCRETE OR EXISTING CMU - NON-ADJUSTABLE


**No. 340 Series Custom Anchors:** 340 Series Strap Veneer Anchors are made to order in metal, gage, and dimensions you specify. They can be fabricated with any combination of bends, holes, slots, corrugations, dowels, or other features required for special types of masonry construction. Available in Stainless Steel, Hotdip Galvanized After Fabrication, Electro Galvanized After Fabrication, and Mill Galvanized.

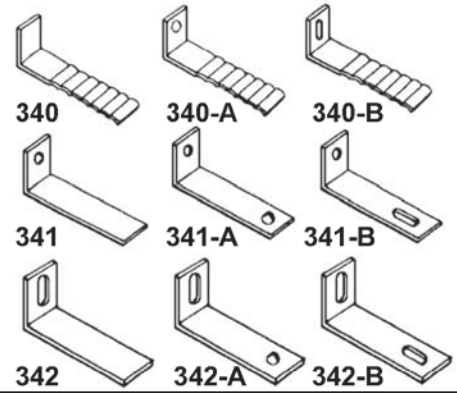

**Wire Masonry Wall Ties:** Use to bond masonry veneer to a masonry backup wall.


**No. 262 Double Eye Rod Anchor**

**Eye Anchor:** 2 3/4" and 4 3/4" long x 2 1/2" wide x 3/16" dia. wire. Available in Stainless, Hotdip Galvanized, or Mill Galvanized.

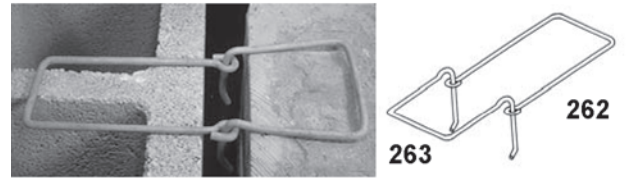


**No. 263 Double Pintle Tie**

**Tie:** 3", 4", and 5" long with 2 1/2" bends. 3/16" dia. wire. (Maximum allowable vertical adjustment is 1 1/4") Available in Stainless, Hotdip Galvanized, or Mill Galvanized.

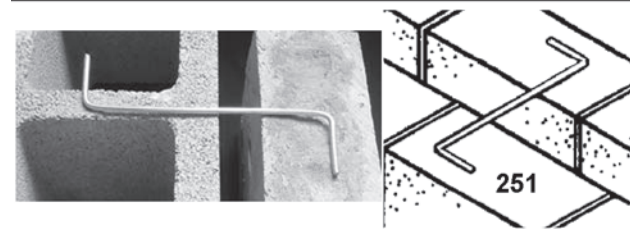

**No. 251-Z Wire Tie:**

3/16" and 1/4" dia. wire with 2" bends in lengths of 6", 8", 10". Available in Stainless, Hotdip Galvanized, or Mill Galvanized.

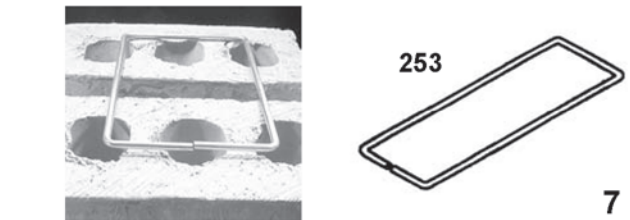

**No. 253 Rectangular Wall Tie**

3/16" dia. wire, 2" or 4" wide in lengths of 6", 8", 10", and 12". Available in Stainless, Hotdip Galvanized, or Mill Galvanized.

**No. 155 Dowels:** Specify diameter, length, and finish.

**No. 87 Dowel Caps:** Dowel caps create a void in concrete so dowel can slide and not restrain movement in concrete slabs. Available in plastic or steel depending on the rod diameter.



**MASONRY**