




4225 W. Ogden Ave. • Chicago, IL 60623 • Phone: (773) 522-1900


SIKAFLEX CONSTRUCTION SEALANTS

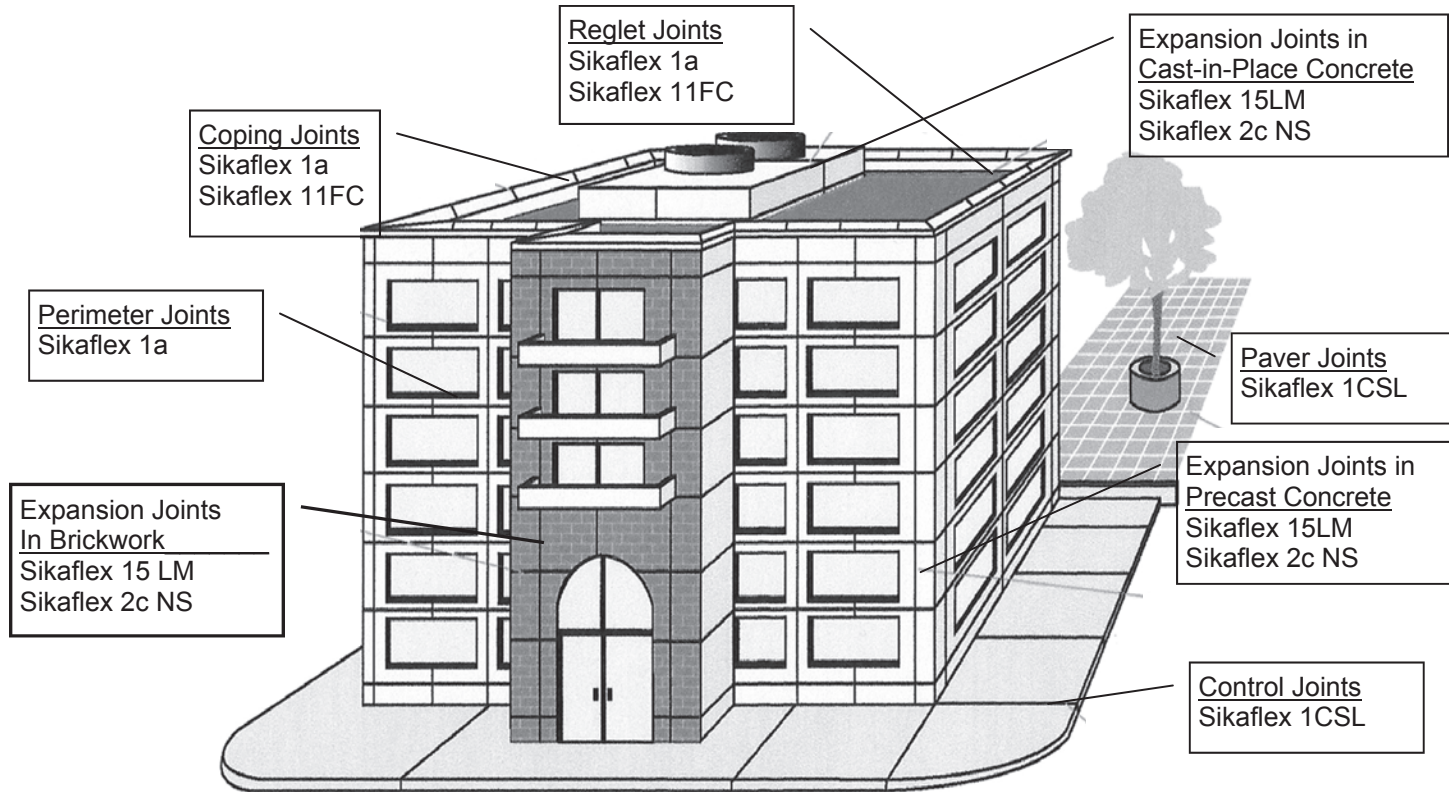

For both new construction and restoration, when it comes to buildings, Sika Corporation has the right product for every sealant application. Sikaflex polyurethane construction sealants provide a long-term, cost-effective solution to meet your building needs.

EXPANSION JOINTS

Expansion joints permit expansion and contraction movements between adjacent parts of a building or concrete work, without rupture or damage.

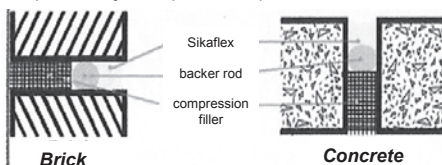


Sikaflex 15LM, a one-component, ultra low modulus, non-sag polyurethane sealant with +100/-50% movement, is excellent in high-rise and curtainwall building applications requiring high-movement capability, and in Exterior Insulation and Finish Systems, requiring low modulus products that won't damage the substrate.

Sikaflex 2c NS, a two component, non sag polyurethane sealant with ±50% movement capability, is excellent when a faster chemical cure is required.

CONTROL JOINTS

Control joints are formed, sawed, tooled or assembled joints installed to induce controlled cracking at pre-selected locations, or where a concentration of stresses is expected. **Sikaflex 1CSL**, a one-component, self-leveling, polyurethane sealant with ±25% movement capability, is especially suited for horizontal control joints such as sidewalks. Its high Shore A hardness and tensile strength lend to the product's extreme durability, important for traffic-bearing applications.

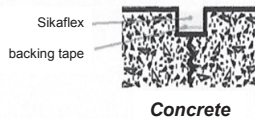

Sikaflex 2cCSL, a two-component, self-leveling, polyurethane sealant with ±50% movement capability, provides a consistent chemical cure even when the temperature and humidity are less than ideal.

SPECIALTY JOINTS

Perimeter Joints

Perimeter joints, found around windows and door frames, are expansion joints with relatively low movement, formed by the outer edge of one panel or material and the leading edge of another. **Sikaflex 1a**, a one-component, non-sag, polyurethane sealant with ±25% movement capability, is excellent for sealing perimeter joints with its easy gunnability and primerless adhesion to a wide variety of construction substrates.

Paver Joints

Joints between paving units are also expansion joints. **Sikaflex 1CSL** is perfect for this application. The unique, "angle-sealed" sausages dispense neat and easily into these typically narrow joints, without the use of a caulking gun. The product's high hardness and tensile strength result in its superior durability when exposed to heavy pedestrian traffic, while a tack-free time of less than two hours significantly reduces dirt pickup.

Accessory Joints

Sikaflex 1a, with a ±25% movement capability, is ideal for use in small, low movement joints such as coping and reglet joints.

Sikaflex 11 FC, a multipurpose, non-sag, polyurethane sealant/adhesive with 12 1/2% movement capability, is well-suited for these applications when faster tack-free and cure times are required.

WATERPROOFING